

**Model 701i/202**  
**Model 703i/203**  
**Surface Mount Speakers\***



FEATURES	GENERAL SPECS	701i/202	703i/203
<ul style="list-style-type: none"> <li>• Professional Commercial Speaker</li> <li>• <b>SELECTABLE SWITCH – 70 V and 8 <math>\Omega</math> Combination</b></li> <li>• 70 V Transformer Tap – 2.5, 5, 10, 15 W</li> <li>• Weatherized Aluminum Casing, Grill and Bracket</li> <li>• Ceiling or Wall Mount Possibilities with the Included "U" Mount Bracket</li> <li>• Black or White</li> <li>• 5 Year Warranty</li> </ul>	<p>Description:  Enclosure:  Outdoor Rated:  Selectable Switch:  70 V Transformer Tap:  Sensitivity (1W / 1M):  Power handling (8 Ohm):  Frequency response:  Crossover:  Dispersion (Horiz/Vert):  Woofer Diameter:  Woofer Material:</p> <p>Tweeter(s):  Tweeter Size:</p> <p>Tweeter Material:  Grill Material:  Dimensions (HxWxD):  Weight:  "U" Mount Bracket:  Color(s):</p>	<p>4", 2-Way Speaker  Aluminum Diecast  Yes  70 V and 8 <math>\Omega</math> Combination  2.5, 5, 10, 15 Watts  88 dB  80 W Max., 40 W Nom.  90 Hz - 20 kHz  6 kHz  140°  4"  Paper Coated / Rubber Surround  1 ea.  .5" (13 mm) Dome  PEI  Aluminum  7" x 4.5" x 4"  5.2 Lbs.  Included  Black, White</p>	<p>4", 3-Way Speaker  Aluminum Diecast  Yes  70 V and 8 <math>\Omega</math> Combination  2.5, 5, 10, 15 Watts  88 dB  100 W Max., 50 W Nom.  90 Hz - 20 kHz  9 kHz  140°  4"  Paper Coated / Rubber Surround  2 ea.  .6" (15 mm) Piezo / .5" (13 mm) Dome  PEI  Aluminum  4.5" x 4" x 7"  4.7 Lbs.  Included  Black, White</p>

\* 701i/202 Replaces Models 201, 202, 701 and 702  
703i/203 Replaces Models 203 and 703

## Model 701i/202

## Model 703i/203


### Surface Mount Speakers\*






GENERAL SPECS	701i/202	703i/203	OPTIONS AVAILABLE
Description:	4", 2-Way Speaker	4", 3-way Speaker	SS36 – 36" In-Ground Stainless Steel Stake
Enclosure:	Aluminum Diecast	Aluminum Diecast	Attenuators:
Outdoor Rated:	Yes	Yes	OWI1070M – Mono, 70 V, 10 W Max.
<b>SELECTABLE SWITCH:</b>	<b>70 V and 8 <math>\Omega</math> Combination</b>	<b>70 V and 8 <math>\Omega</math> Combination</b>	OWI3570M – Mono, 70V, 35 W Max.
70 V Transformer Tap:	2.5, 5, 10, 15 Watts	2.5, 5, 10, 15 Watts	OWI7570M – Mono, 70 V, 75 W Max.
Sensitivity (1W / 1M):	88 dB	88 dB	OWI2570S – Stereo, 70 V, 25 W Max.
Power handling (8 Ohm):	80 W Max., 40 W Nom.	100 W Max., 50 W Nom.	Volume Controls:
Frequency response:	90 Hz - 20 kHz	90 Hz - 20 kHz	25WPVC – 25W, Waterproof, Impedance Matching
Crossover:	6 kHz	9 kHz	72WPVC – 72 W, Waterproof, Impedance Matching
Dispersion (Horiz/Vert):	140°	140°	
Woofer Diameter:	4"	4"	
Woofer Material:	Paper Coated / Rubber Surround	Paper Coated / Rubber Surround	
Tweeter(s):	1 ea.	2 ea.	
Tweeter Size:	.5" (13 mm) Dome	.6" (15 mm) Piezo / .5" (13 mm) Dome	
Tweeter Material:	PEI	PEI	
Grill Material:	Aluminum	Aluminum	Engineered in the USA
Dimensions (HxWxD):	7" x 4.5" x 4"	4.5" x 4" x 7"	Made in China
Weight:	5.2 Lbs.	4.7 Lbs.	
"U" Mount Bracket:	Included	Included	
Color(s):	Black, White	Black, White	
Warranty:	5 Years	5 Years	

\* 701i/202 Replaces Models 201, 202, 701 and 702  
703i/203 Replaces Models 203 and 703

### POLAR CHARTS

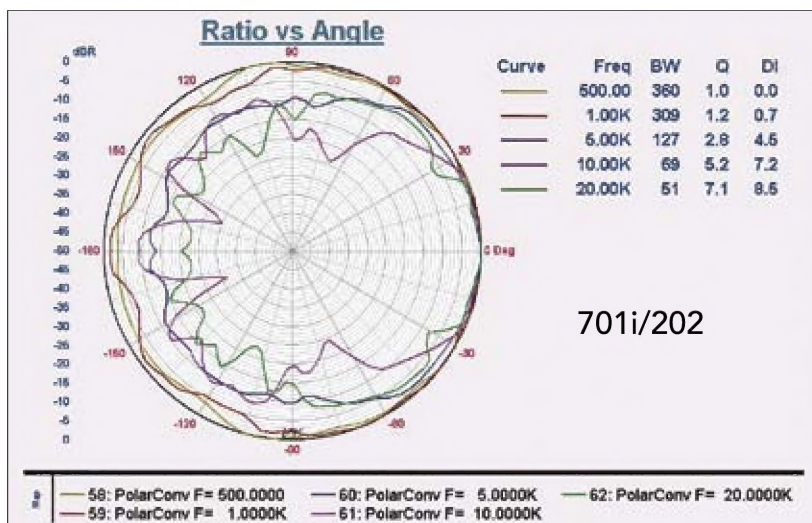

### FREQUENCY RESPONSE CHARTS

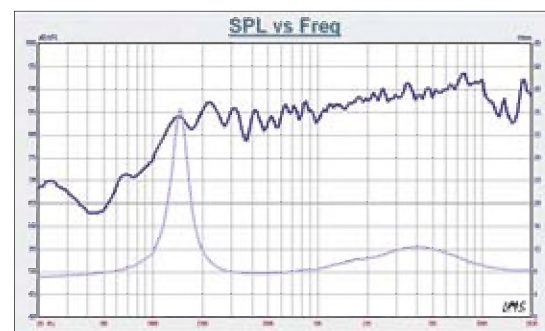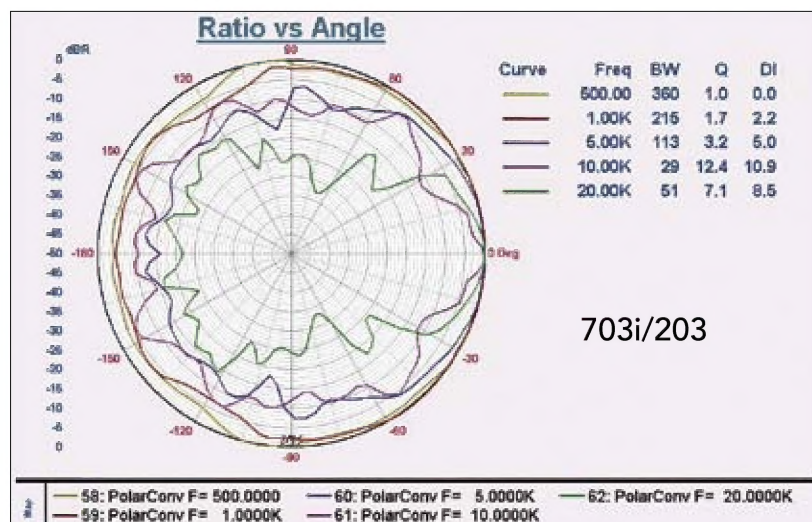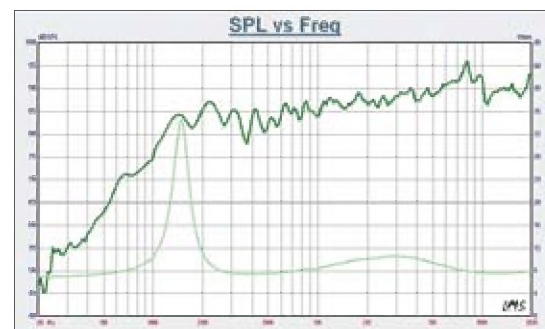

### OWI, Inc.

17141 Kingsview Ave.  
Carson, CA 90746 USA

ph. 310.515.1900

toll free 800.638.1694

fax 310.515.1606

email info@owi-inc.com

web www.owi-inc.com